

Th-1535

RISC based HMI Computing Series



Fanless 15 inch 400 nits HMI with
1024 x 768 screen resolution based around
TI Sitara AM3517 ARM Cortex-A8 processor.



System

CPU	TI Sitara AM3517 @ 600 MHz
Memory	256 MB DDR2
Storage	512 MB NAND Flash
Supported OS	Linux 2.6.x, Windows CE6, Android

Interfaces

Connectors	12 VDC in, microSD cardslot, 4 USB Host, 2 RS-232 of which 1 is switchable RS-232/ 422/ 485, CAN bus, LAN
------------	--

Display

Graphic capabilities	POWERVR SGX 530 10Mpolys/s
API support	OpenGL 2.0, OpenGL ES 1.1, OpenVG 1.0
Screen	15" LCD display
Resolution	1024 x 768 pixels
Maximum colors	262K
Luminance	400 cd/m ²
Touchscreen	4 wire resistive

Power


Input power	12 VDC
-------------	--------

Environmental and Mechanical

Temperature	0° to 50° C
Humidity	10-90%
Dimensions	366 x 290 x 48 mm 14 3/8 x 11 3/8 x 1 7/8 inch
MTBF	>50,000 hours
Weight	3.8 Kg
Certification	CE, FCC, RoHS compliant

Dimensions

units in mm

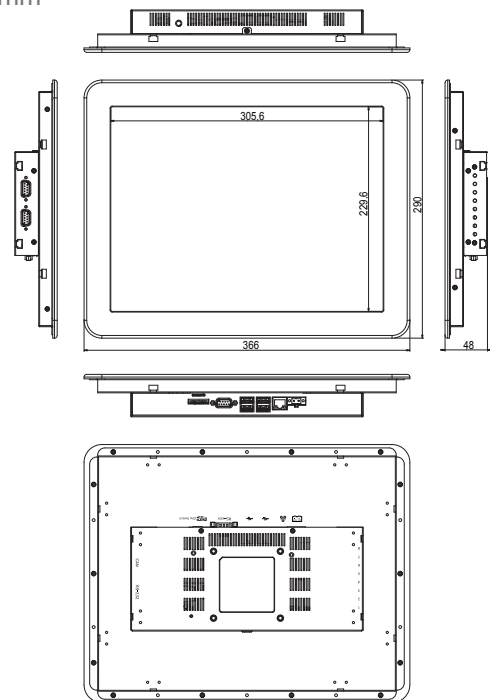

Order Information

Th-1535	15 inch HMI with TI AM3517
---------	----------------------------

Options

Wireless LAN	802.11b/g integrated module
Speakers	2 Watt speakers (2x)
Magnet front bezel	magnetic mounted bezel



www.systemtech.se

Tel: 013-35 70 30
sales@systemtech.se
Linnégatan 14 • 582 25 LINKÖPING

