

Impact-R 3080




Features

The Impact-R 3080 series computers are powered by Intel® based motherboards, delivering a compact and flexible computer platform.

- Intel® Coffee lake CPU architecture
- DDR4 Memory up to 64GB
- Supports 3 native displays

Our production processes are controlled under ISO 9001 and every system undergoes a full diagnostic burn-in prior to shipment.

Dimensions

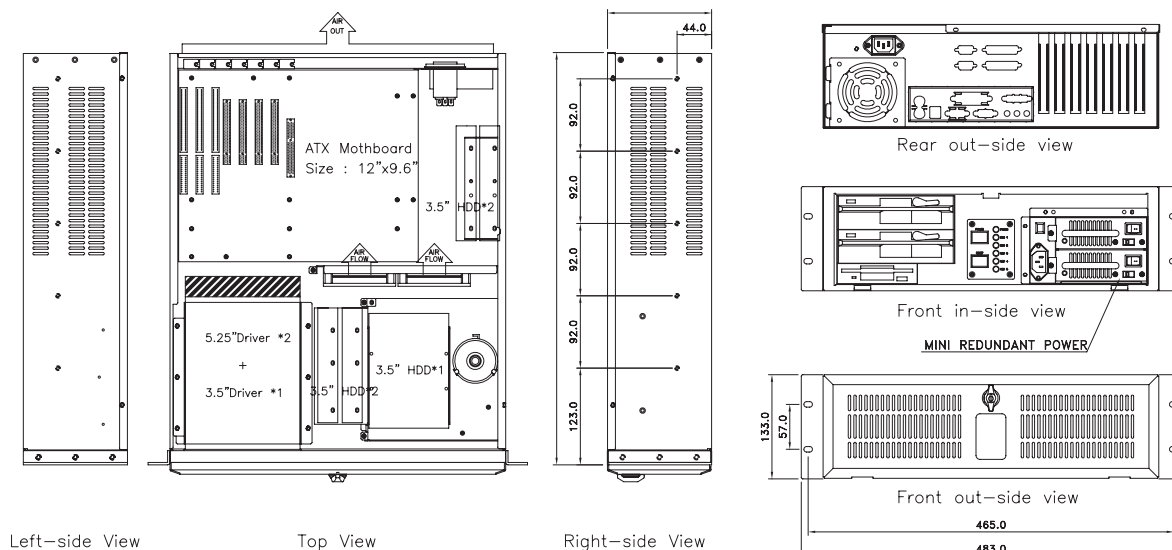

Configuration shown is for illustration purposes only

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.com Email: sales@amplicon.com

Impact-R 3080

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

Specifications

Hardware Specification	CPU: Intel® LGA1151 8th Generation Chipset: Intel® Q 370 Memory: 4 x DIMM (max 64GB DDR4 2666MHz non-ECC Dual channel architecture) Graphics: Integrated GPU: DP - max 4096*2160 @ 24Hz DVI-D - max 1920*1200 @ 60Hz VGA - max 1920*1200 @ 60Hz LAN: Dual Intel® GbE (i219LM/i211AT)	Mechanical	Design: EIA RS-310C 19" Rackmount Standard Construction: 1.2mm SECC Zinc-Coated Steel Security: Lockable front door Color: Black (custom colours available for large orders) Dimensions: 483(W) x 133(H) x 526(D)mm (19.0" x 5.2" x 20.7") Packaging Size: 588(W) x 285(H) x 703(D)mm (23.1" x 11.2" x 27.7") Total drive capacity: 2 x 5.25", 1 x 3.5" external, 4 x 3.5" internal Cooling: 1 x 80mm, 2 x 92mm ball bearing fan Air filter: removeable (washable) Gross Weight: approximately 18 kg
BIOS	Insyde SPI 256Mbit	Environmental operation	Acoustic noise: Approximately 49dB(A) sound pressure at 23°C (typical) Temperature: 5 to 60°C (tested for extended operation up to 50°C) Humidity: 5 to 90% at 25°C non-condensing
Storage	Total Drive capacity: 2 x 5.25", 1 x 3.5" external, 4 x 3.5" internal RAID: 0, 1, 5, 10 *Options for mSATA available and M.2	Environmental storage	Temperature: -20 to 70°C Humidity: 5 to 90% at 25°C non-condensing
System Expansion	1 x PCIe x16 (Gen 3) 1 x PCIe x4 (Gen 3) 5 x PCI 1 x mPCIe (support mSATA) 1 x M.2 M key (PCIe x4) (support Optane Memory)	Electromagnetic Compatibility (EMC)	EN55032 Class A EN55024 Electrostatic discharge immunity test (EN61000-4-2) Enclosure port ±4kV Contact, applied to enclosure port ±8kV Air, applied to enclosure port Radiated, radio-frequency, electromagnetic field immunity test (EN61000-4-3) Enclosure port 80-1000MHz, 10 V/m (RMS, no modulation) 80% Modulation with 1kHz Sine wave Electrical fast transient/burst immunity test (EN61000-4-4) Power port AC, inc. protective earth Severity ±0.5kV Surge Immunity test (EN61000-4-5) Power port Severity ±0.5kV applied line to earth Immunity to conducted disturbances induced by radiofrequency fields (EN61000-4-6) Power port inc. protective earth via CDN M3 0.15-80MHz, 10 V/m (no modulation) 80% Modulation with 1kHz Sine wave, applied via CDN Amplicon own a fully equipped EMC facility and can provide many additional tests to meet your requirements.
System Architecture	ATX		
Supported O/S	Microsoft Windows 10 64-bit		
LED's and Switches	Power (PC on) LED Hard Disk Drive access LED ATX system control switch System reset switch		
External Interfaces	Front: 2 x USB 2.0/1.1 On/Off Switch, Reset Pwr/HDD LEDs Rear: 2 x GbE (RJ-45) 4 x USB 3.1 (Gen1) 2 x USB 2.0 1 RS-232/422/485 (RS-232 w/power) (DB-9) 1 x PS/2 (mini-DIN-6) 1 x VGA 1 x DVI-I (DVI-D signal) 1 x DP++ 1 x Line-out, 1 x Mic-in		
Optional Breakout Interfaces (Will use 1 slot per breakout)	5 x DB9 (1 x RS232/422/485, 4 x RS232) 1 x Dual USB 3.1 (Gen 2)		
iAMT	Rev: 12.0		

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.com Email: sales@amplicon.com