

# ECS-9200/9100 Series


Quad Core Intel® Xeon®/Core™ i7/i5/i3 (Skylake/Kaby Lake) Fanless Embedded System with Intel® C236, 6 GigE LAN with 4 M12 PoE+, 2 Front-access SSD/HDD Tray, 1 PCI/PCIe x16 Slot, 8 USB 3.0, M2DOM, M.2 Socket, 3 SIM, 32 Isolated DIO, High Performance, Rugged, -40°C to 75°C Extended Temp



- 6 Independent GigE LAN with 4 M12 IEEE 802.3at PoE+
- Expansion: 1 PCI/PCIe x16, 3 Mini PCIe/mSATA, 1 M.2
- PCIe x16 expansion supports up to 160W Power Budget
- Storage: 2 2.5" SSD Tray, 1 CFAST, 1 M2DOM, 2 SATA III
- 6V to 36V DC Power Input with 80V Surge Protection
- Configurable Ignition Power Control
- Fanless, -40°C to 75°C Operating Temperature
- 32 Isolated DIO, 8 USB 3.0
- LGA 1151 Socket supports workstation-grade Intel® Xeon®/Core™ i7/i5/i3 Processor with C236
- DVI-I, DVI-D & DisplayPort interfaces, up to 4K display
- 3 External SIM Socket for 3G/4G/LTE/WiFi/GPRS/UMTS



Vehicle Computing



Machine Vision




Smart Manufacturing



Intelligent Surveillance




Robot Control



# Dimensions & Drawing

Unit: mm (inch)

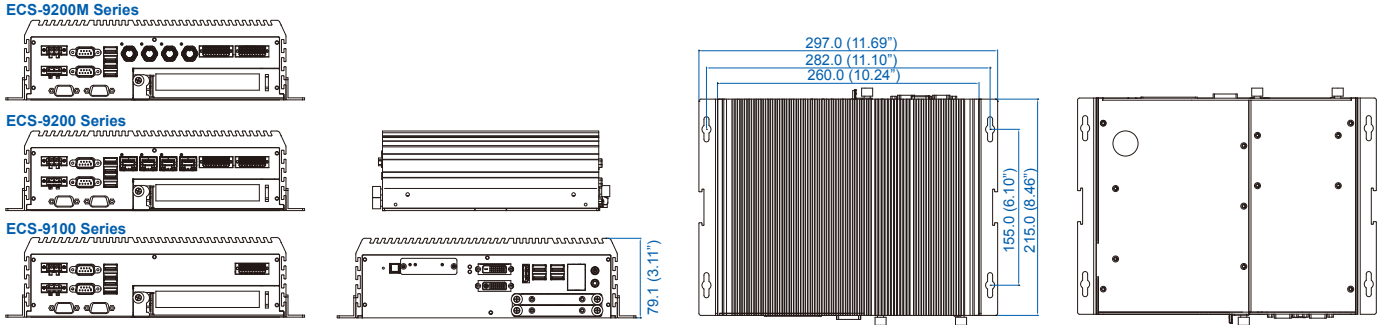

## Specifications

### System

Processor	Quad Core Intel® Xeon®/Core™ i7/i5/i3 Processor (Skylake-S/Kaby Lake-S)
Chipset	Intel® C236
BIOS	AMI
SIO	IT8786E
Memory	2 DDR4 2133MHz SO-DIMM, up to 32GB

### I/O Interface

Serial	4 COM RS-232/ 422/ 485 (ESD 8KV)
USB	• 8 USB 3.0 (4 Front, 4 Rear) • 1 USB 2.0 (Internal)
Isolated DIO	<b>ECS-9200</b> : 32 Isolated DIO : 16 DI, 16 DO <b>ECS-9100</b> : 16 GPIO
LED	Power, HDD, Wireless, PoE
SIM Card	3 External SIM Card Socket

### Expansion

Mini PCIe	3 Full-size for PCIe/ USB/ External SIM Card/ mSATA
PCI/ PCIe	1 PCI/ PCIe x16 Slot (PCIe x16 supports up to 160W Power Budget)
M.2	1 M.2 Socket (Key ID : M)

### Graphics

Processor Interface	Intel® HD Graphics 630/530
	• DVI-I : Up to 1920 x 1200 @ 60Hz
	• DVI-D : Up to 1920 x 1200 @ 60Hz
	• DisplayPort : Up to 4096 x 2304 @ 60Hz

### Storage

SATA	2 SATA III (6Gbps) support S/W RAID 0, 1
mSATA	3 SATA III (Mini PCIe Type, 6Gbps)
M2DOM	1 PCIe 3.0 (8GT/s)
Storage Device	• 1 CFast Socket, Push-in/ Push-out Ejector • 2 Front-access 2.5" SSD/ HDD Tray

### Audio

Audio Codec	Realtek ALC892, 5.1 Channel HD Audio
Audio Interface	1 Mic-in, 1 Line-out

### Ethernet

LAN 1	Intel® I219LM GigE LAN supports iAMT 11.0
LAN 2	Intel® I210 GigE LAN

### PoE (ECS-9200)

LAN 3 to LAN 6	GigE IEEE 802.3at (25.5W/48V) PoE+ by Intel® I210, M12 Connector (ECS-9200M)
----------------	--

### Power

Power Input	6V to 36V, DC-in
Power Interface	3-pin Terminal Block : V+, V-, Frame Ground
Ignition Control	16 Mode (Internal)
Remote Switch	3-pin Terminal Block
Surge Protection	Up to 80V/1ms Transient Power

### Others

TPM	Optional Infineon SLB9665 supports TPM 2.0, LPC Interface
Watchdog Timer	Reset : 1 to 255 sec./min. per step
Smart Management	Wake on LAN, PXE supported
HW Monitor	Monitoring temperature, voltages. Auto throttling control when CPU overheats.

### Software Support

OS	Windows 10, Windows 8.1, Windows 7, Linux
----	---

### Mechanical

Dimensions (WxLxH)	260mm x 215mm x 79mm (10.2" x 8.5" x 3.1")
Weight	4.2 kg (9.26 lb)
Mounting	• Wallmount by mounting bracket • 2U Rackmount (Optional)

### Environment

Operating Temp.	<b>35W TDP CPU :</b>
	• Core™ i7, i5, i3 : -40°C to 75°C (-40°F to 167°F)
	• Xeon® E3-1268L v5 : -40°C to 70°C (-40°F to 158°F)
Storage Temp.	<b>65W TDP CPU :</b>
	Core™ i7, i5, i3 : -40°C to 55°C (-40°F to 131°F)
Humidity	<b>80W TDP CPU :</b>
	Xeon® E3-1275 v6, E3-1275 v5, E3-1225 v5 : -40°C to 45°C (-40°F to 113°F)
	-40°C to 85°C (-40°F to 185°F)
	5% to 95% Humidity, non-condensing
	95% @ 75°C
	• IEC 60068-2-27
	• SSD : 50G @ wallmount, Half-sine, 11ms
	• IEC 60068-2-64
	• SSD : 5Grms, 5Hz to 500Hz, 3 Axis
	CE, FCC, EN50155, EN50121-3-2
Shock	• IEC 60068-2-27
	• SSD : 50G @ wallmount, Half-sine, 11ms
Vibration	• IEC 60068-2-64
	• SSD : 5Grms, 5Hz to 500Hz, 3 Axis
EMC	CE, FCC, EN50155, EN50121-3-2

## Order Information

ECS-9210M	• ECS-9200, 6 GigE LAN w/4 A-coded M12 PoE+, 2 SSD Tray, 1 PCIe x16, 8 USB 3.0, 4 COM, 3 SIM, 32 Isolated DIO
ECS-9210	• ECS-9200, 6 GigE LAN w/4 PoE+, 2 SSD Tray, 1 PCIe x16, 8 USB 3.0, 4 COM, 3 SIM, 32 Isolated DIO
ECS-9201M	• ECS-9200, 6 GigE LAN w/4 A-coded M12 PoE+, 2 SSD Tray, 1 PCI, 8 USB 3.0, 4 COM, 3 SIM, 32 Isolated DIO
ECS-9201	• ECS-9200, 6 GigE LAN w/4 PoE+, 2 SSD Tray, 1 PCI, 8 USB 3.0, 4 COM, 3 SIM, 32 Isolated DIO
ECS-9110	• ECS-9100, 2 GigE LAN, 2 SSD Tray, 1 PCIe x16, 8 USB 3.0, 4 COM, 3 SIM, 16 GPIO
ECS-9101	• ECS-9100, 2 GigE LAN, 2 SSD Tray, 1 PCI, 8 USB 3.0, 4 COM, 3 SIM, 16 GPIO

DDR4 16G	• Certified DDR4 16GB 2133MHz RAM
DDR4 8G	• Certified DDR4 8GB 2133MHz RAM
DDR4 4G	• Certified DDR4 4GB 2133MHz RAM
PWA-280W-WT	• 280W, 24V, 85V AC to 264V AC Power Adaptor with 3-pin Terminal Block, Wide Temperature -30°C to +70°C
PWA-160W-WT	• 160W, 24V, 85V AC to 264V AC Power Adaptor with 3-pin Terminal Block, Wide Temperature -30°C to +70°C
PWA-120W	• 120W, 24V, 90V AC to 264V AC Power Adapter with 3-pin Terminal Block
VESA Mount	• VESA Mounting Kit
DIN-RAIL	• DIN Rail Kit
Rack Mount	• 2U Rackmount Kit
TMK2-20P-100	• Terminal Block 20-pin to Terminal Block 20-pin Cable, 100cm
TMK2-20P-500	• Terminal Block 20-pin to Terminal Block 20-pin Cable, 500cm
TMB-TMBK-20P	• Terminal Board with One 20-pin Terminal Block Connector and DIN-Rail Mounting
3G Module	• Mini PCIe 3G/GPS Module with Antenna
4G Module	• Mini PCIe 4G/GPS Module with Antenna
WiFi & Bluetooth Module	• Intel® Mini PCIe WiFi & Bluetooth Module with Antenna

### CPU List

Series	CPU	Cache (MB)	Turbo Freq. (GHz)	TDP (W)	ECC Memory	
Intel® Xeon®	E3-1275 v6	8	4.2	80	Y	
	E3-1275 v5		4	80		
	E3-1225 v5		3.7	80		
	E3-1268L v5		3.4	35		
Intel® Core™	i7-7700	8	4.2	65	NA	
	i7-7700T		3.8	35		
	i7-6700		4	65		
	i7-6700TE		3.4	35		
	i5-7500	6	3.8	65	NA	
	i5-7500T		3.3	35		
	i5-6500		3.6	65		
	i5-6500TE		3.3	35		
	i3-7101E		3	3.9		65
	i3-7101TE			3.4		35
i3-6100	4	3.7		65		
i3-6100TE		2.7	35			

ECS-9200-9100-20170426